

Day-Brite



CFI

by Signify


Industrial

LED dock light

120/277 V

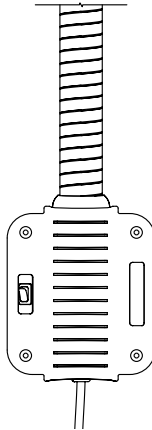

Project: _____
Location: _____
Cat.No: _____
Type: _____
Lamps: _____ Qty: _____
Notes: _____

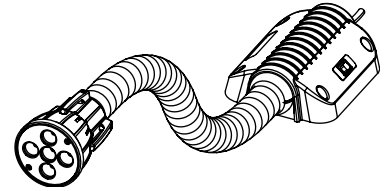

Example: ID5L32-120

ID	5	L	-	-	-
Family		Lamp Source		Voltage	
ID – Industrial Dock Light		L – LED		120 277	
	No. of Lamps		Extended Length		Options
	5 – Light Engine with 5 Cool White LEDs		32" – Stainless Steel Arm and Die Cast Head 42" – Stainless Steel Arm and Die Cast Head		XO – No Convenience Receptacle (Optional for 120V unit, standard on 277V unit)

ID5L LED dock light

Application

- An energy saving alternative to the traditional 150 Watt PAR unit.
- Consumes only 15 Watts and save 135 Watts when compared to the 150 Watt PAR dock light.


Construction & Features

- Die cast aluminum head assembly.
- All metal construction for extended life.
- Flexible arm is infinitely adjustable and almost indestructible.
- Painted "safety yellow" after fabrication for high visibility.
- Shipped fully assembled with a replaceable LED module included.

Electrical

- Certified by ETL to meet UL 153 and CSA C22.2 No. 12 standards.
- Electronic LED driver.
- Suitable for damp locations.
- Meets NEC and OSHA general safety requirements.

Dimensions

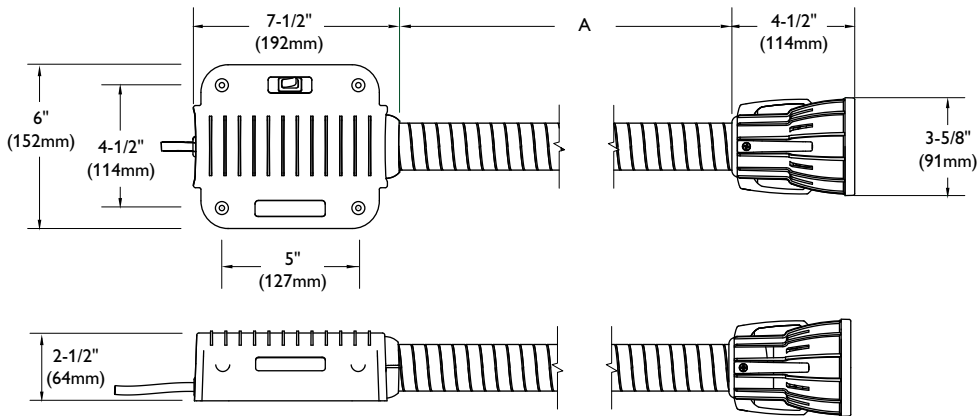

LED Dock Light Dimensions		
	32"	42"
A	28-1/8"	38-1/8"

ID5L LED dock light

Photometry

LED Dock Light

Catalog No. ID5L32-120
Test No. ITL62971

Footcandles at 52.8'

2.4	2.9	3.5	3.9	3.9	3.5	2.9	2.4
3.0	3.8	4.6	5.3	5.3	4.7	3.8	3.1
3.6	4.6	5.6	6.3	6.3	5.7	4.6	3.7
4.0	5.3	6.5	7.2	7.3	6.5	5.3	4.1
4.1	5.2	6.4	7.2	7.2	6.5	5.3	4.1
3.6	4.6	5.7	6.5	6.5	5.8	4.7	3.7
2.9	3.7	4.4	5.0	5.0	4.5	3.7	3.0
2.2	2.7	3.3	3.6	3.7	3.3	2.8	2.3
1.7	2.0	2.3	2.5	2.5	2.3	2.0	1.7

Footcandles at 26'

1.8	2.1	2.1	1.9	1.5	1.2	1.0	0.9
3.4	4.6	4.8	3.7	2.5	1.7	1.2	1.0
7.1	10.6	11.3	8.0	4.6	2.4	1.5	1.1
12.1	19.7	21.0	14.0	7.2	3.4	1.8	1.2
15.5	24.9	26.5	17.9	8.4	3.7	1.9	1.2
12.0	19.5	20.7	13.8	6.9	3.3	1.8	1.2
6.7	10.0	10.6	7.6	4.4	2.5	1.6	1.1
3.4	4.3	4.5	3.6	2.6	1.7	1.3	1.0
1.9	2.1	2.2	2.0	1.6	1.3	1.1	0.9

Footcandles at 1'

0.1	0.2	0.1	0.1	0.1	0.0	0.0	0.1
0.4	0.4	0.2	0.1	0.1	0.0	0.0	0.1
1.9	1.3	0.6	0.2	0.1	0.1	0.0	0.1
11.7	5.6	1.6	0.5	0.2	0.1	0.1	0.1
131	18.7	3.1	0.7	0.2	0.1	0.1	0.1
99.0	17.4	3.0	0.7	0.2	0.1	0.1	0.1
9.4	4.9	1.4	0.4	0.1	0.1	0.0	0.1
1.4	1.1	0.5	0.2	0.1	0.1	0.0	0.1
0.4	0.3	0.2	0.1	0.1	0.1	0.0	0.1

